LO Purifier Disc Clean

Lub. oil purifier disc cleaner

"LO Purifier Disc Clean" is a superior cleaning agent to remove hard scales and the several deposits on the LO purifier disc.

Characteristics

Appearance	: Colorless transparent - Cloudy	Flash point	: None
Density	: approx. 1.19 g/cm^3 （15℃）	Reaction	: Acidity
Main components	: Phosphoric acid, Special surface active agent		

Benefits

① Removes hard carbon and calcium sulfate-based scales on the LO purifier disk effectively.

② Soak cleaning with undiluted LO Purifier Disc Clean softens the scales and enables to remove the deposits from the disc easily with fresh water.


③ Can be used repeatedly - economical to use.

Direction for use

① Dismantle the LO purifier and take out the discs should be cleaned.

② Soak separator disc in LO Purifier Disc Clean and leave 30 - 60 minutes.
(plastic container (polyethylene made) with sufficient capacity should be selected for soak cleaning.)

③ Take out separator disc from the container and rinse with fresh water.

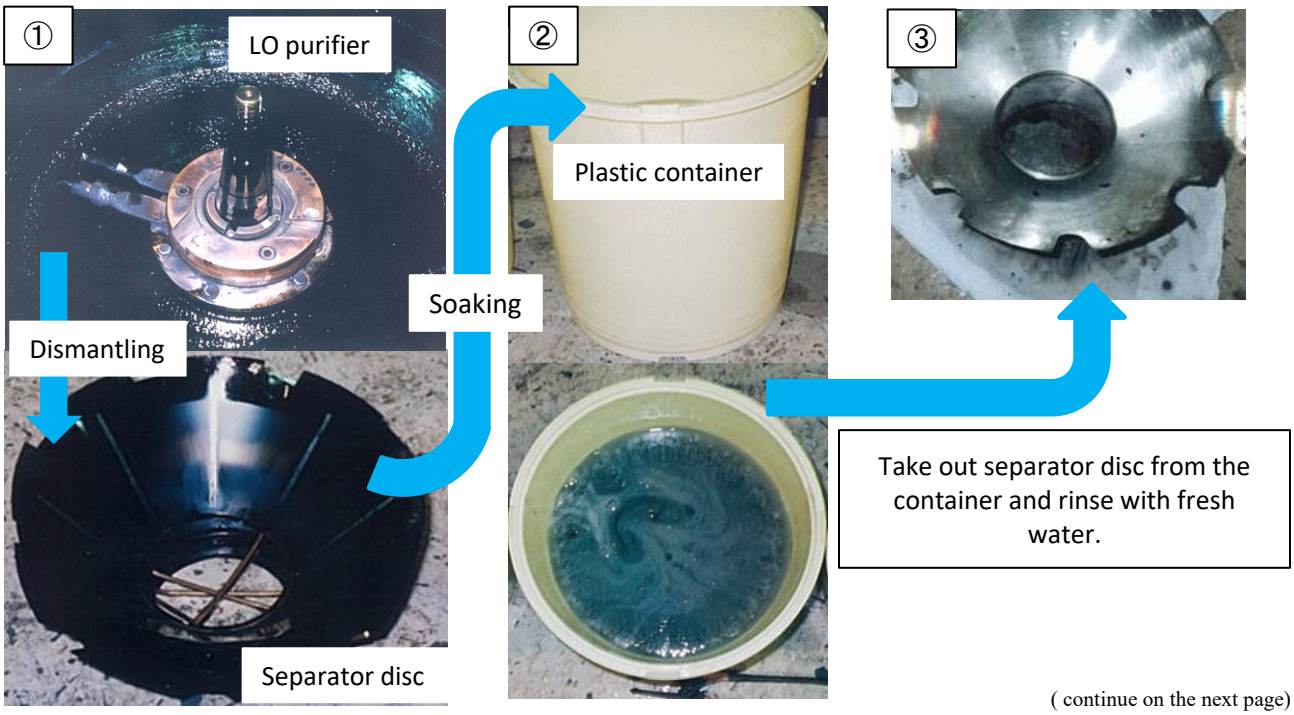

(continue on the next page)

Precautions

① Do not apply LO Purifier Disc Clean on any rubbers and metals except stainless steel.

②The detergent has acidic properties which damages fibrous materials if the detergent is applied on textile and rope products. Immediately wipe away the detergent if it comes in contact.

③MATERIALS TO AVOID due to the corrosion risk Light metals (Aluminum, Zinc, etc.) and Concrete (cemer

④ Dispose the used detergent as industrial waste.

⑤ Do not change the container for storage to avoid the risk of accidental spillage.

Safety and handling

① Use necessary protection gears, gloves, goggles, mask during cleaning operation.

② Sufficiently ventilate the room during the cleaning operation.

③ First-aid measures

- When liquid gets into worker's eyes: Immediately rinse off with clean water for more than 15 minutes.
- When liquid gets on worker's skin: Immediately wash off with soap and water.
  (care with skin conditioning cream is recommended.)

※Seek medical attention depending on the degree of injury.

Storage

- Seal the container tightly when not in use and store in a cool and dry place.


Container

	NET(L)	Weight (kg)	Size, (WxDxH,cm)
●polyethylene container	18	23.1	25.2 x 28.5 x 39.5



NIPPON YUKA KOGYO CO., LTD.
Head Office： TEL： (+81)-45-201-8867 / FAX： (+81)-45-201-8358
Kobe Branch： TEL： (+81)-78-321-4105 / FAX： (+81)-78-321-4107

←You can contact us here!
(https://www.nipponyuka.jp/)



2023.08